


VTH5221DW-C-S1

Wi-Fi Indoor Monitor



Functions


- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 6ch wireless alarm integration(433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)

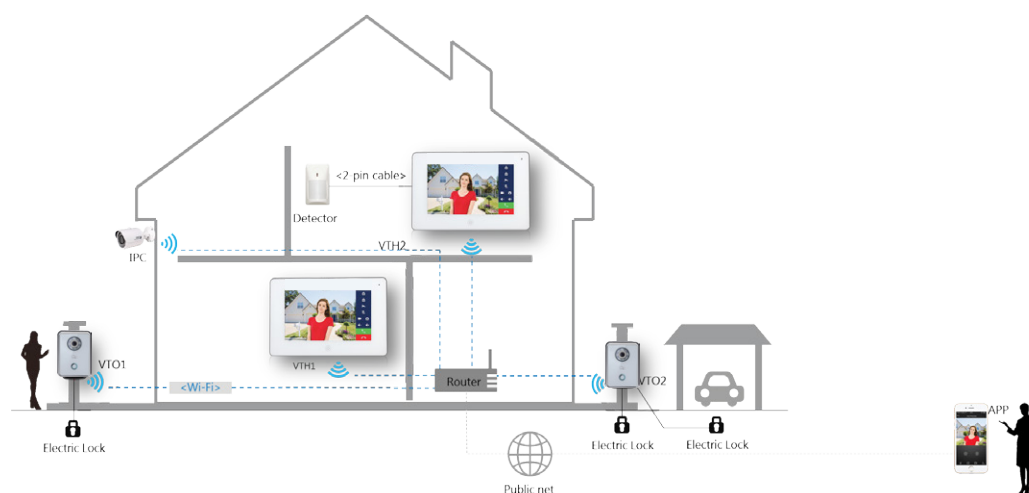

VTH5221DW-C-S1

System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	2.2mm
Angle of View	D:125° H:105°
Audio	
Audio Compression	G.711
Audio Input	All-Direction Microphone
Audio Output	Built-In Loudspeaker
Bidirectional Talk	Support Dual-Way Bidirectional Talk
Display	
LCD Screen	7" 1024x600, Capacitive
Operation Mode	
Input	Touch Buttons
Interface	
Wired Zones	6 On-Board Zones
Wireless Zones	6 Wireless Zones
Alarm Out	1
RS485	1
Network	
Wi-Fi	IEEE802.11b/g/n
Ethernet	10M/100Mbps Self-Adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V, PoE (802.3af)
Power Consumption	Standby $\leq 1W$, Work $\leq 7W$
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	215.0mm×140.0mm×21.0mm
Weight	0.8Kg

Dimensions (mm)

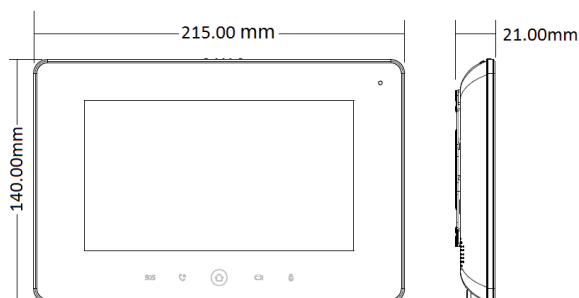

View Area

