



Specification: **BSD-3013**

- Miniature floor mount
- Universal magnet for flexibility in mounting
- Extruded aluminum casings for harsh environments
- Wire: #22AWG with 22" armored cable
- Longer cable available on request
- Switches or magnets are available separately
- Jacket cable available: BSD3013-JK
- Resistor, Diode and Supervisory Loop available on request

... Overhead Door Contact

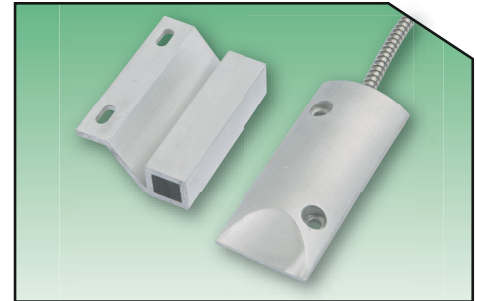

Dimension (mm):

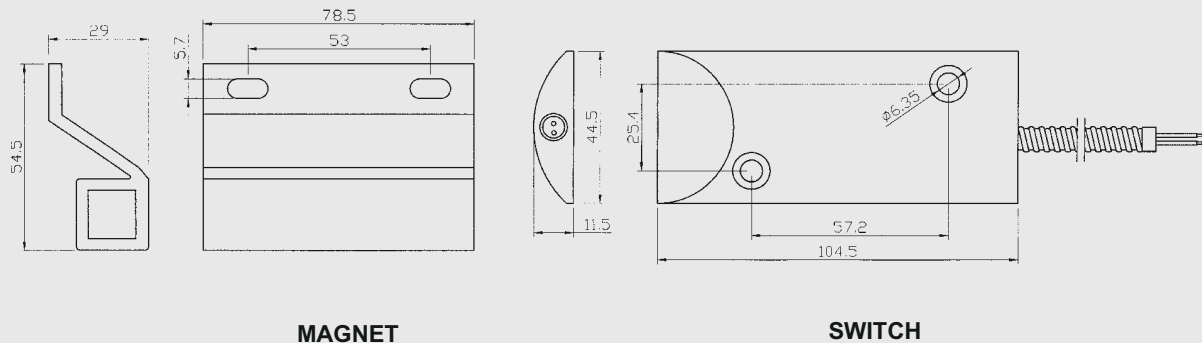

Order Information:



Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Departure Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
BSD-3013	Closed	N/O	2.5 (65)	2.8 (71)	0.150	7.5	100	0.4
BSD-3013WG	Closed	N/O	3 (75)	3.3 (83)	0.150	7.5	100	0.4
BSD-3013A	Open	N/C	2.4 (60)		0.150	3	30	0.2
BSD-3013C	Closed & Open	SPDT	2.4 (60)		0.150	3	30	0.2
BSD-3013D	DPDT	2SPDT	2.4 (60)		0.150	3	30	0.2

* These magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm